


VDX104

800MHz Vortex86DX PC/104 Module

FEATURES

- Onboard 800MHz Vortex86DX SoC
- 512MB onboard DDR2 RAM
- 4 serial, 2 USB 2.0
- 10/100 LAN
- Type I CompactFlash™
- Extended temperature operation
- Fanless

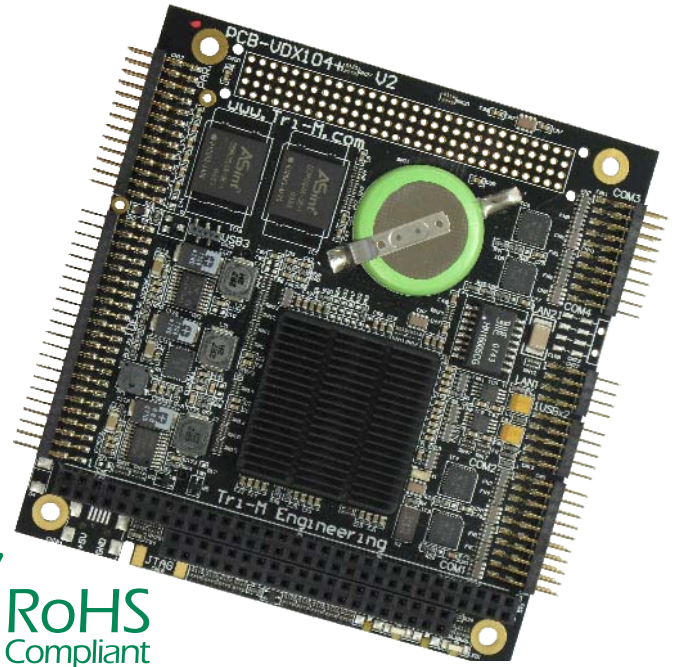

SYSTEM

CPU	DM&P SoC CPU Vortex86DX-800MHz
BIOS	AMI BIOS
Cache	16K I-Cache, 16K D-Cache
System Chipset	Vortex86DX
I/O Chipset	Vortex86DX
Ethernet Chipset	Vortex86DX
Ethernet Interface	10/100Base-T
Expansion	PC/104 standard compliant
Speaker Out	Onboard speaker
Real Time Clock	RTC with lithium battery backup
Watchdog Timer	Yes

INTERFACE

Serial Port	4x 16550-compatible serial ports, RS-232
LAN Port	10/100 Ethernet
EIDE	2x EIDE (Ultra DMA 100)
Parallel Port	1x bi-directional AT-compatible printer port
USB Port	2x USB 2.0
K/B & Mouse	PS/2
GPIO	1x 8-bit GPIO port
Redundancy	1x Redundancy port
SPI	1x External SPI port

MEMORY & STORAGE

Memory	Onboard 512MB DDR2 RAM
Storage	Type I CompactFlash™ socket

SOFTWARE SUPPORT

Operating System (O/S)	AMI PC BIOS - 100% x86 compatible, DOS, MS-DOS, DRDOS, LINUX, Windows™CE
------------------------	--

ELECTRICAL SPECIFICATIONS

Power Input	Single 5V DC operation
Power Consumption	2.5 watt, (+5V@500mA)

ENVIRONMENT & MECHANICAL

Operating Temperature	-40° to 85°C
Storage Temperature	-50° to 125°C
Relative Humidity	5 to 90% @ 40°C, relative humidity, non-condensing
Dimension (LxWxH)	3.55" x 3.775" x 0.9"
Weight	53g (incl. battery)

WARRANTY

1 year limited warranty

ORDERING INFORMATION

Part Number	
VDX104-1E-PBF	Vortex86DX 800MHz PC/104 Module, 4 serial, 1 parallel, 2 USB, E-IDE, 512MB DDR2, 1 LAN
Accessories	
VDX104-1E-KIT	Starter Kit for VDX104
CABLESET1-VSX104	Cable kit for VSX104 and VDX104 (2x dual serial, 1x parallel, 1x dual USB, 1x EIDE, 1x LAN, 1x utility)